Haven

FIXED SITE-BUILT CFS

Concept pricing and engineering review

November 10, 2026

Dark lines: schematic walls | Teal: exterior openings | Pale blocks: fixtures or furniture

Verify traced partition offsets and all rough openings against native drawings before detailing.

PROGRAM AND SOURCE BASIS

2 bedrooms / 2 baths / office / living / kitchen

SH01-ARC-00165-01 / Rev H / Jan 2026

1,210 SF rectangle / 1,179 SF drawing title / 1,188 SF catalog.

Low gable. Source elevation shows 1.2:12; assembly to be verified.

PRICING GEOMETRY

1,210.00 SF plan/roof projection / 143.00 LF perimeter. Slab assumed; roof overhangs, slope and thickness excluded from these areas.

ADAPTATION NOTES

Keep the source stair bay and storage as a reserved zone. Upper destination, headroom, guards and egress need a separate scope decision.

Retain the bedroom, office and bath arrangement and the three exterior entry positions. The source fold joints are omitted.

CFS wall panels and engineered roof framing over site foundation. Panel breaks, bracing, hold-downs and connection design remain open.

Studio

FIXED SITE-BUILT CFS

Concept pricing and engineering review

November 10, 2026

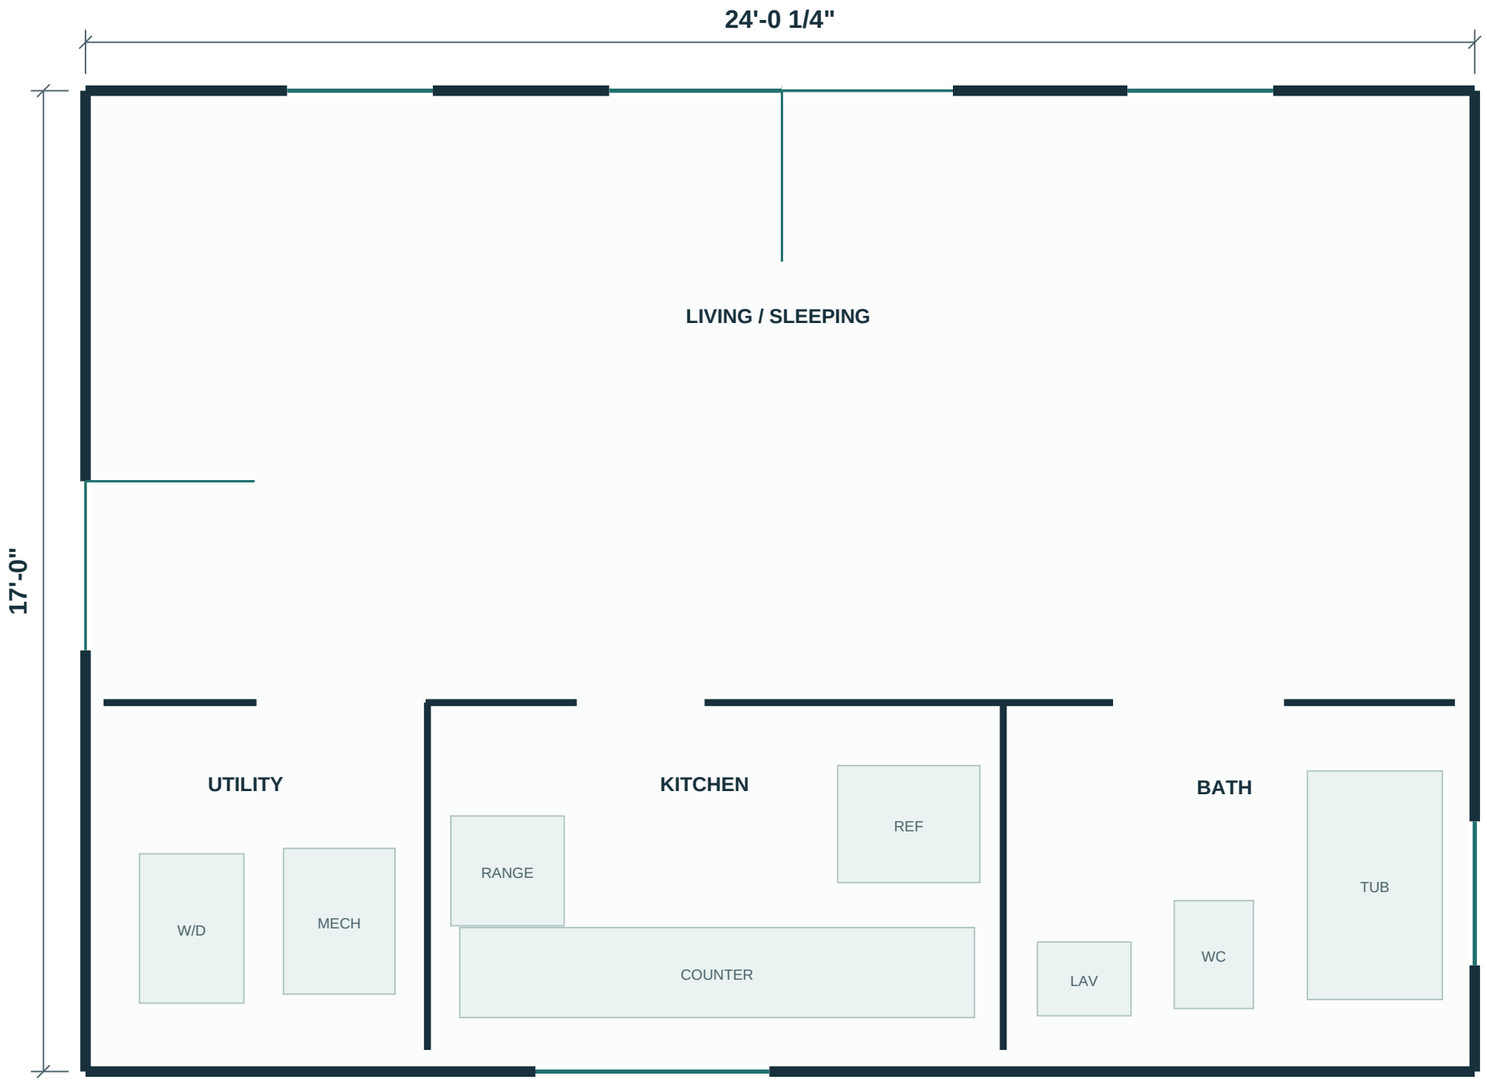

Dark lines: schematic walls | Teal: exterior openings | Pale blocks: fixtures or furniture

Verify traced partition offsets and all rough openings against native drawings before detailing.

PROGRAM AND SOURCE BASIS

Open living/sleeping / kitchen / bath / utility

GENERAL LAYOUT / Rev 0 / June 2024

408.35 SF rectangle / 420 SF catalog. Source elevation rounds length to 24 ft.

Low shed. Slope and standing-seam assembly subject to engineering and product limits.

PRICING GEOMETRY

408.35 SF plan/roof projection / 82.04 LF perimeter. Slab assumed; roof overhangs, slope and thickness excluded from these areas.

ADAPTATION NOTES

Keep the open living/sleeping space and rear utility, kitchen and bath band. The utility space and kitchen service clearances need an equipment layout check.

Replace skid and fold construction with permanent slab and fixed panels. Verify required sleeping-space escape opening and accessible route where applicable.

CFS wall panels and engineered roof framing over site foundation. Panel breaks, bracing, hold-downs and connection design remain open.

Parkview

FIXED SITE-BUILT CFS

Concept pricing and engineering review

November 10, 2026

Dark lines: schematic walls | Teal: exterior openings | Pale blocks: fixtures or furniture

Verify traced partition offsets and all rough openings against native drawings before detailing.

PROGRAM AND SOURCE BASIS

2 bedrooms / 1 bath / living / kitchen / utility

SH01-ARC-000XX-01 / Rev B / Mar 2025

595 SF rectangle and drawing title / 588 SF catalog. Brochure dimension differs.

Low shed. Source shows 0.35:12; confirm a listed roof assembly or revise slope.

PRICING GEOMETRY

595.00 SF plan/roof projection / 104.00 LF perimeter. Slab assumed; roof overhangs, slope and thickness excluded from these areas.

ADAPTATION NOTES

Archived 2-bedroom technical drawing sets this concept. Confirm owner-approved revision because the brochure also lists a 1-bedroom option.

Preserve the two flanking bedrooms and central living/kitchen spine. Replace fold seam and shipping logic with fixed panels.

CFS wall panels and engineered roof framing over site foundation. Panel breaks, bracing, hold-downs and connection design remain open.